


## TECHNICAL SPECIFICATIONS

### Rope Grab Attached Lanyard 3'

5/8" Large Bail Yellow Chromate Finish Rope Grab, attached 3 ft. shock absorbing web lanyard and 3/4" hook. Meets or exceeds ANSI Z359.1-2007.

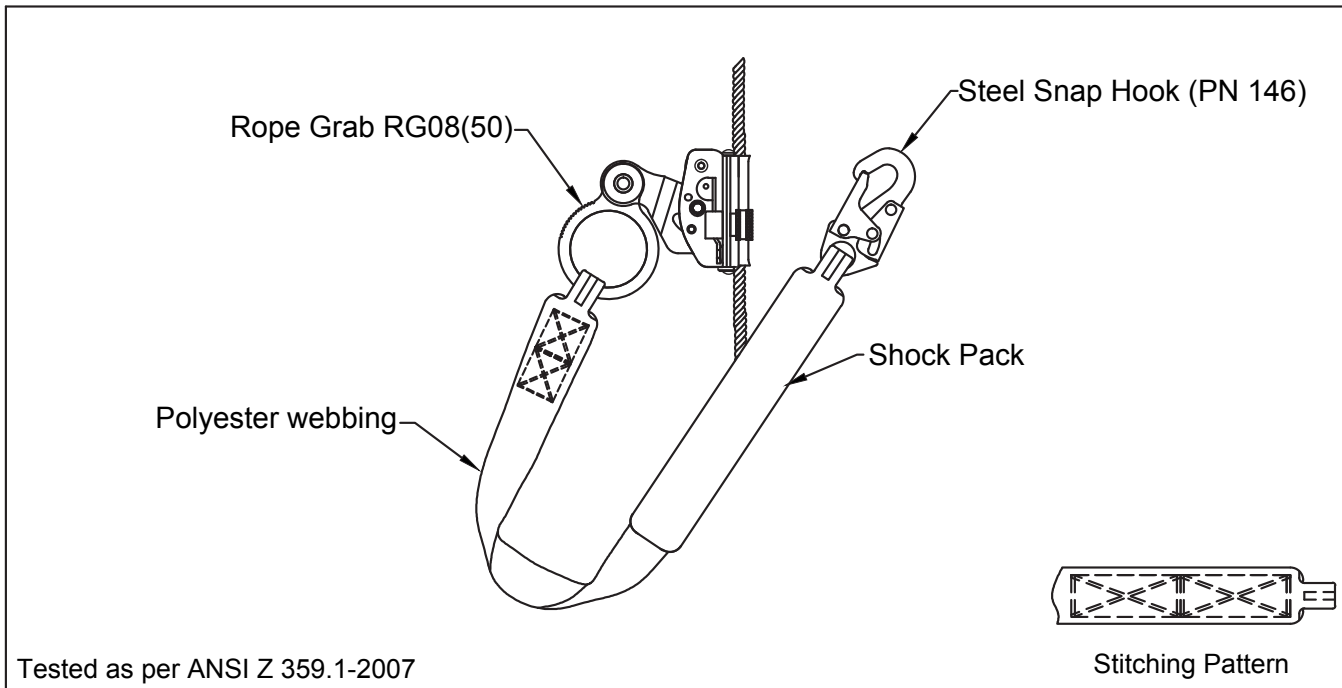

**DESIGN:**

- Rope grab with 3' lanyard
- Connected with a Shock Pack and has a Snap Hook (PN 146) at the end for attachment to the harness
- The rope grab is used over the twisted rope life line

**WEBBING:** Material: Polyester | Width: 1.73 in. ± 0.03 in. | Breaking Strength: 26.68 kN (Min)

**STITCHING THREAD:** Material: High-tenacity polyamide | Color: Black

**METAL COMPONENT:** Material: Alloy Steel  
 Plating: Zinc Plated | Finish: Silver or Golden Yellow Galvanized  
 Tensile Strength (PN-124): MIN 22.2 kN | Tensile Strength (PN-131): MIN 22.2 kN  
 Gate Face Testing (PN-124): MIN 1.0 kN | Gate Face Testing (PN-131): MIN 1.0 kN  
 Side Load Testing (PN-124): MIN 1.6 kN | Side Load Testing (PN-131): MIN 1.6 kN

**VITAL TEST COMPLIANCE:**

Static Strength: 22.2 kN for 1 minutes  
 Dynamic Strength: Maximum breaking force does not exceed 8 kN in the line to a test mass of 220.46 lbs.

**WEIGHT:** 2.82 lbs. ± 0.02 lbs.