

PN: L151211




• Fall Protection • Competent Training • Netting • PPE

Phone: (504) 733-1808
Fax: (504) 733-2996
PalmerSafetyUS.com

TECHNICAL SPECIFICATIONS

Double Leg Lanyard 6 ft. 12 ft. free fall. Blue shock pack, small hooks.

6 ft. Double leg lanyard, 3/4" hooks. Yellow webbing. Meets or exceeds ANSI Z359.13-2013.

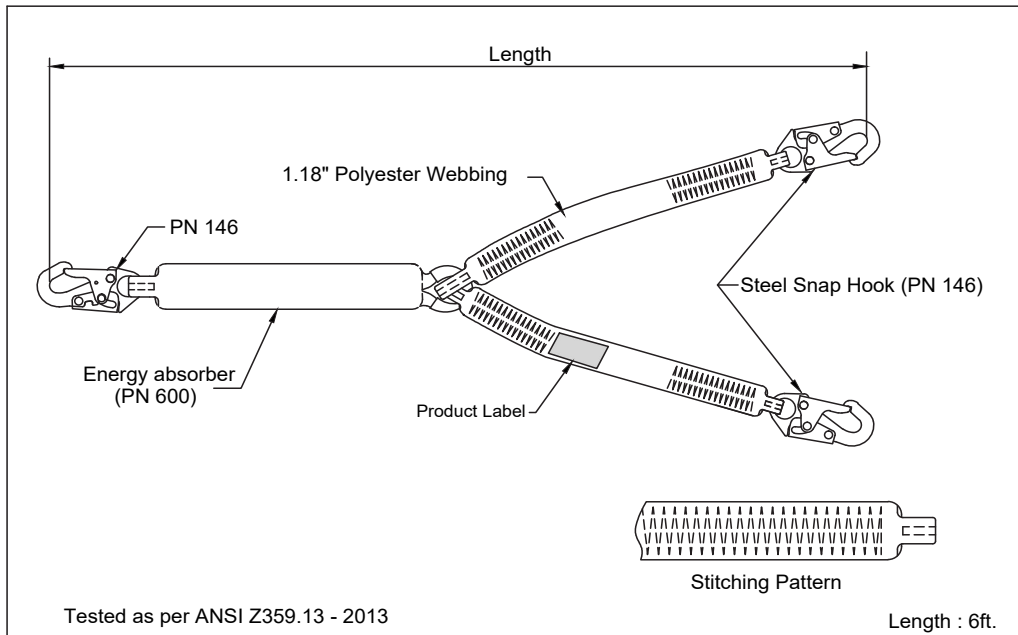

- DESIGN:**
- Double, Y shaped lanyard
 - Webbing lanyard incorporated with Energy absorber (PN 600).
 - One side of the lanyard equipped with Steel Snap Hook (PN-146) and other side of the lanyard also equipped with Two Steel Snap Hook (PN-146).

WEBBING: Material: Polyester
Width: 1.18 in. \pm 0.03 in.
Breaking Strength: 6000 lbs (Min)

STITCHING THREAD: Material: High-tenacity polyester

METAL COMPONENTS: Material: Alloy Steel
Finish: Shot blasted
Plating: Zinc Plated
Breaking Strength: 5000 lbs.

VITAL TEST COMPLIANCE: Static Strength: 5000 lbs for 1 Minutes.
Dynamic Strength : Maximum breaking force does not exceed 8 kN in the line when tested on a free fall from 12 ft. height attached to a test mass of 282.19 lbs.

WEIGHT: 4.13 lbs. \pm 0.02 lbs.