


## TECHNICAL SPECIFICATIONS

### Adjustable lanyard 4 - 6 ft. Blue shock absorber, rebar hook.

4 - 6 ft. adjustable shock absorbing lanyard with 2-1/4" rebar hook. Meets or exceeds ANSI Z359.13-2013.

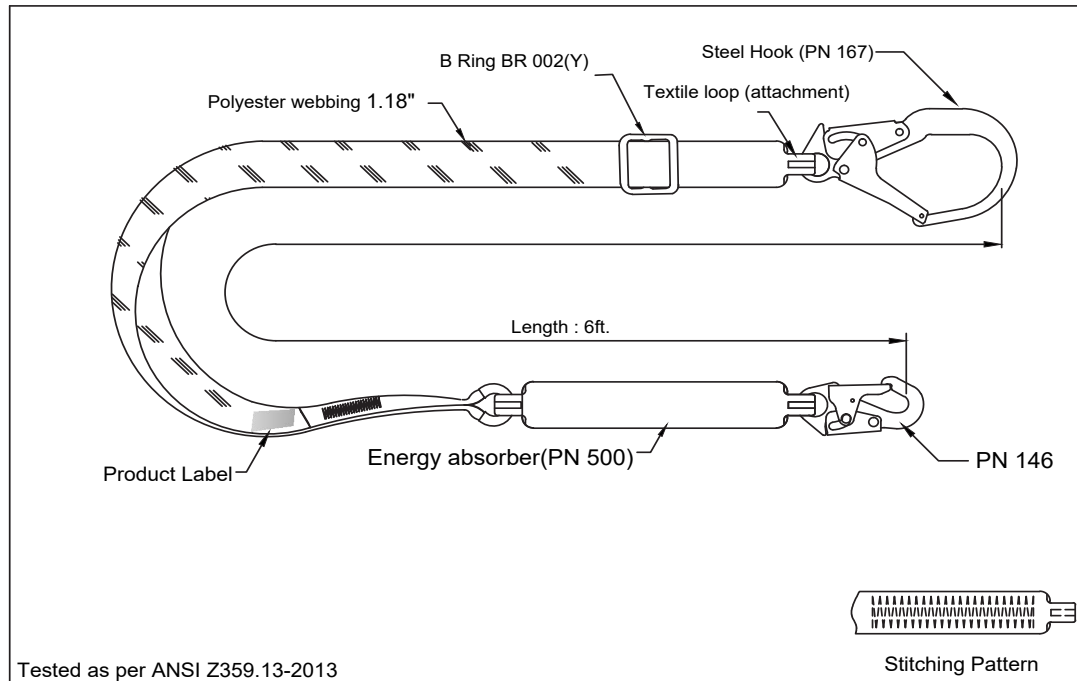

**DESIGN:**

- Webbing lanyard incorporated with shock absorber.
- One side of the lanyard equipped with steel snap hook (PN 146) and the other side of the lanyard equipped with Steel hook (PN 167).
- Adjuster ring provides for adjustment.

**WEBBING:** Material: Polyester  
 Width: 1.18 in. ± 0.03 in.  
 Breaking Strength: 6000 lbs (Min)

**STITCHING THREAD:** Material: High-tenacity polyester

**METAL COMPONENTS:** Material: Alloy Steel  
 Finish: Silver or Golden Yellow Galvanized  
 Breaking Strength: 5000 lbs.

**VITAL TEST COMPLIANCE:** Static Strength: 5000 lbs for 1 Minutes.  
 Dynamic Strength : Maximum breaking force does not exceed 8 kN in the line when tested on a free fall from 6 ft. height attached to a test mass of 282.19 lbs.

**WEIGHT:** 3.61 lbs. ± 0.02 lbs.