

PN: L615222




• Fall Protection • Competent Training • Netting • PPE

Phone: (504) 733-1808
Fax: (504) 733-2996
PalmerSafetyUS.com

TECHNICAL SPECIFICATIONS

LANYARD 6 FT. FR, 6 FT. FREE FALL. SHOCK ABSORBER, SMALL HOOKS. DOUBLE LEG.

Double leg Y style made out of 0.98 in. FR webbing with 3/4" hooks and shock absorber (6 ft.) free fall. Meets or exceeds ANSI Z359.13-2013.

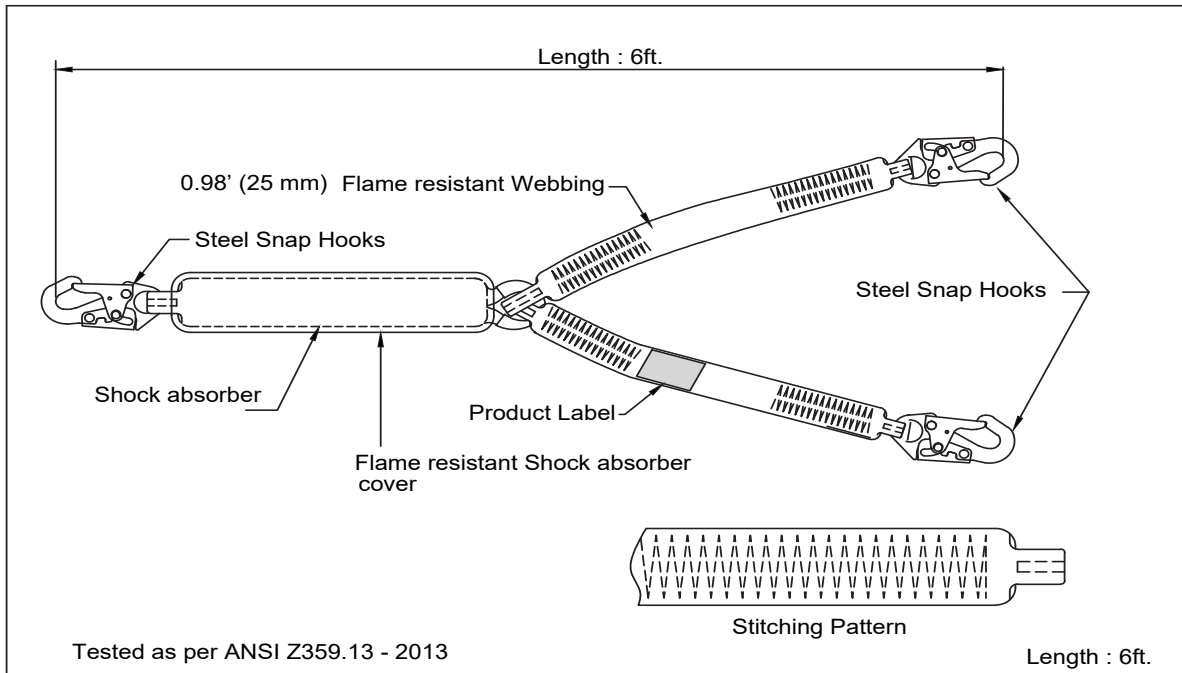

- DESIGN**
- Double, Y shaped lanyard.
 - Webbing lanyard incorporated with shock absorber.
 - Steel Stamped Snap Hook at all three ends.

WEBBING: Material: Aramid (Nomax type)
Width: 0.98' ± 0.03' (25 ± 1 mm)
Breaking Strength: 6000 lbs. (Min)

STITCHING THREAD: Material: Kevlar

METAL COMPONENTS: Material: Alloy Steel | Plating: Zinc Plated | Finish: Shot blasted | Breaking Strength: 5000 lbs.

VITAL TEST COMPLIANCE: Static Strength: 5000 lbs. for 1 Minutes.
Dynamic Strength : Maximum breaking force does not exceed 8 kN in the line when tested on a free fall from 6 ft. height attached to a test mass of 282.19 lbs.

WEIGHT: 4.16 ± 0.02 lbs.(1890 gm ± 10 gm)