
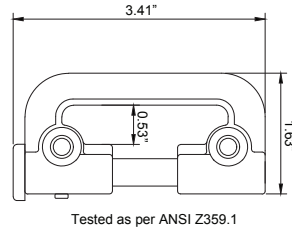
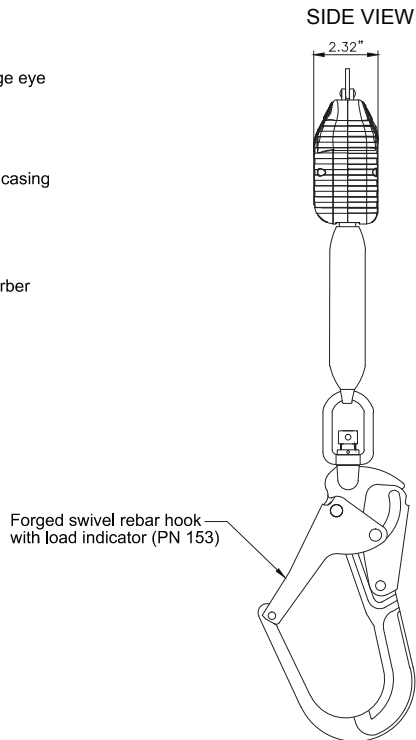



TECHNICAL SPECIFICATIONS

Dual SRL 6' Light Weight Web with Rebar Hook with Connector (SRL170 or SRL 169)

6' retractable web, lightweight composite housing, external shock absorber, 1/2" carabiner included. Available with either a 2-1/4" rebar hook, 3/4" aluminum quarter turn hook, or a 2-1/4" aluminum rebar hook. Meets or exceeds ANSI Z359.14-2014 Class A.

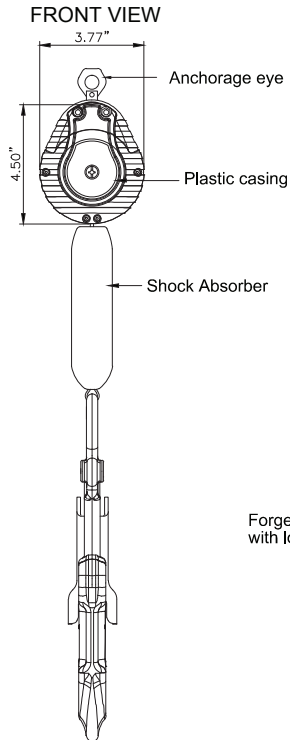

SRL170 - Hook Twin SRL Steel Connector



SRL169 - Hook Twin SRL Connector



Tested as per ANSI Z359.14-2014 CLASS A

PHYSICAL PARAMETERS:

- Composite housing.
- Lightest available SRD in its range/class.
- Robust & durable plastic casting.
- Technora Webbing with Energy absorber.
- Swivel steel rebar hook at attachment end (PN 153 as per ANSI Z359.12-2009 gate strength 3600 lbs.)

LENGTH: 6 ft. (Maximum)

WEBBING: Material: Technora webbing 13/16"
 Minimum Breaking Strength: 4500 lbs.

VITAL TEST COMPLIANCE:

Static Strength: 3000 lbs. for 1 minute.
 Dynamic Strength: 300 lbs. mass subjected to a 4' free fall. SRL lock and remain lock until released.
 Dynamic Performance: 282 lbs. mass subjected to a zero free fall with extension of 36" webbing. Breaking force less than 1800 lbs. and arrest distance less than 24".

WEIGHT: 3.37 lbs. ± 0.02 lbs. (per SRL)