


## TECHNICAL SPECIFICATIONS

### Harness 5pt., QCB, Padded Back & Leg, & Back D-ring. Black Color.

Black top , black padding, 5 point adjustment, QCB, padded back sewn in, padded legs sewn in, and back d-ring. Universal size. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012

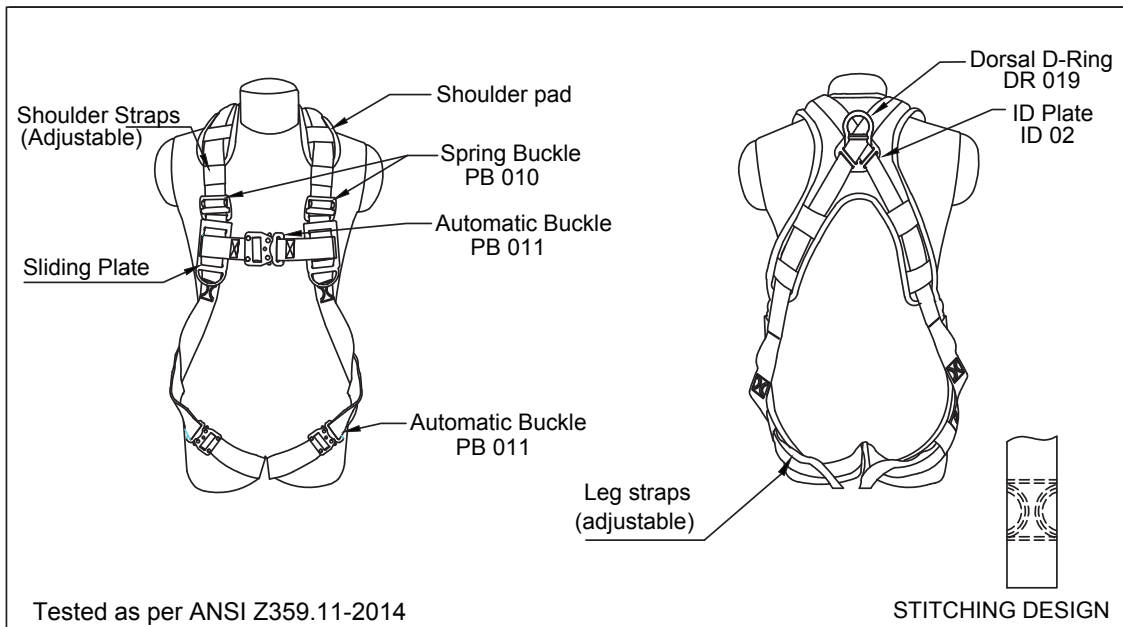

**USER CAPACITY:** 130 - 310 lbs. (59 -140 kg)

- DESIGN:**
- One dorsal attachment D-ring for fall arrest.
  - Adjustable shoulder straps for easy adjustment and snug fitting.
  - Adjustable leg straps for snug fitting.
  - Two lanyard keepers have been incorporated to store unused leg of the lanyard.

**WEBBING:** Material: Polyester  
 Width: 1.73 in. ± 0.04 in.  
 Breaking Strength: 5000 lbs.

**STITCHING THREAD:** Material: High-tenacity polyester

**METAL COMPONENT:** Material: Alloy Steel  
 Finish: Silver or Golden Yellow Galvanized, Black Electrophoretic

**D-RING:** Material: Aluminum Alloy  
 Finish: Natural Silver Polished or Powder Coated

**VITAL TEST COMPLIANCE:** Static Strength: 3600 lbs. for 1 Minute  
 Dynamic performance: Free fall from 6 feet height done to a test dummy weighing 220.46 lbs. at dorsal attachment element. Harness should not release the dummy for 5 minutes (Retention time).

**WEIGHT OF HARNESS:** 3.79 lbs. ± 0.02 lbs.