


PN: H22312162

TECHNICAL SPECIFICATIONS

Harness 5pt., QCB, Padded Back and Leg, Back/Side D-Rings, Positioning Belt, Dual Front D-Rings.

5 point harness, QCB, padded back and padded legs sewn in. Positioning belt black. 3 D-rings. Front Dual D-rings, and fall indicators. Universal size. Meets or Exceeds ANSI Z359.11-2014. A10.32-2012.

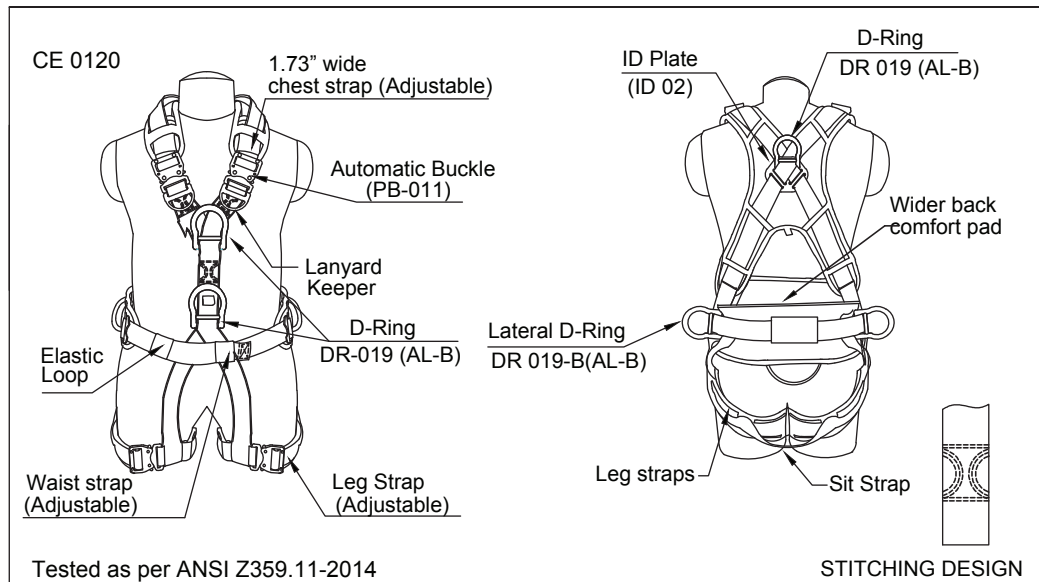

USER CAPACITY:

- 130 – 310 lbs. (59 -140 kg)

DESIGN:

- Dorsal D-ring for fall arrest and one front D-ring for climbing
- Adjustable shoulder straps for easy adjustment and snug fitting.
- Adjustable leg straps for snug fitting.
- Two lanyard keepers have been incorporated to store unused leg of the lanyard.
- Equipped with work positioning belt.
- Equipped with two side D-rings for work positioning.
- Equipped with ventral D-ring for rope access purpose.

WEBBING: Material: Polyester | Width: 1.73 in. \pm 0.04 in. | Breaking Strength: 5000 lbs.

STITCHING THREAD:

Material: High-tenacity polyester

METAL COMPONENT:

Material: Alloy Steel
Finish: Silver or Golden Yellow Galvanized

D-RING: Material: Aluminum Alloy | Finish: Natural Silver Polished or Powder Coated

VITAL TEST COMPLIANCE:

Static Strength: 3600 lbs. for 1 Minute at attachment element.
Dynamic performance: Free fall from 6 feet height done to a test dummy weighing 220.46 lbs. at dorsal attachment element. Harness should not release the dummy for 5 minutes (Retention time).

WEIGHT OF HARNESS:

5.82 lbs. \pm 0.02 lbs.