


TECHNICAL SPECIFICATIONS

Lanyard 6 ft. Internal Shock, Rebar Hook, Single Leg

6 ft. single leg, non-stretch, internal shock absorber lanyard, 2-1/4" rebar hook. Meets or exceeds ANSI Z359.13-2013.

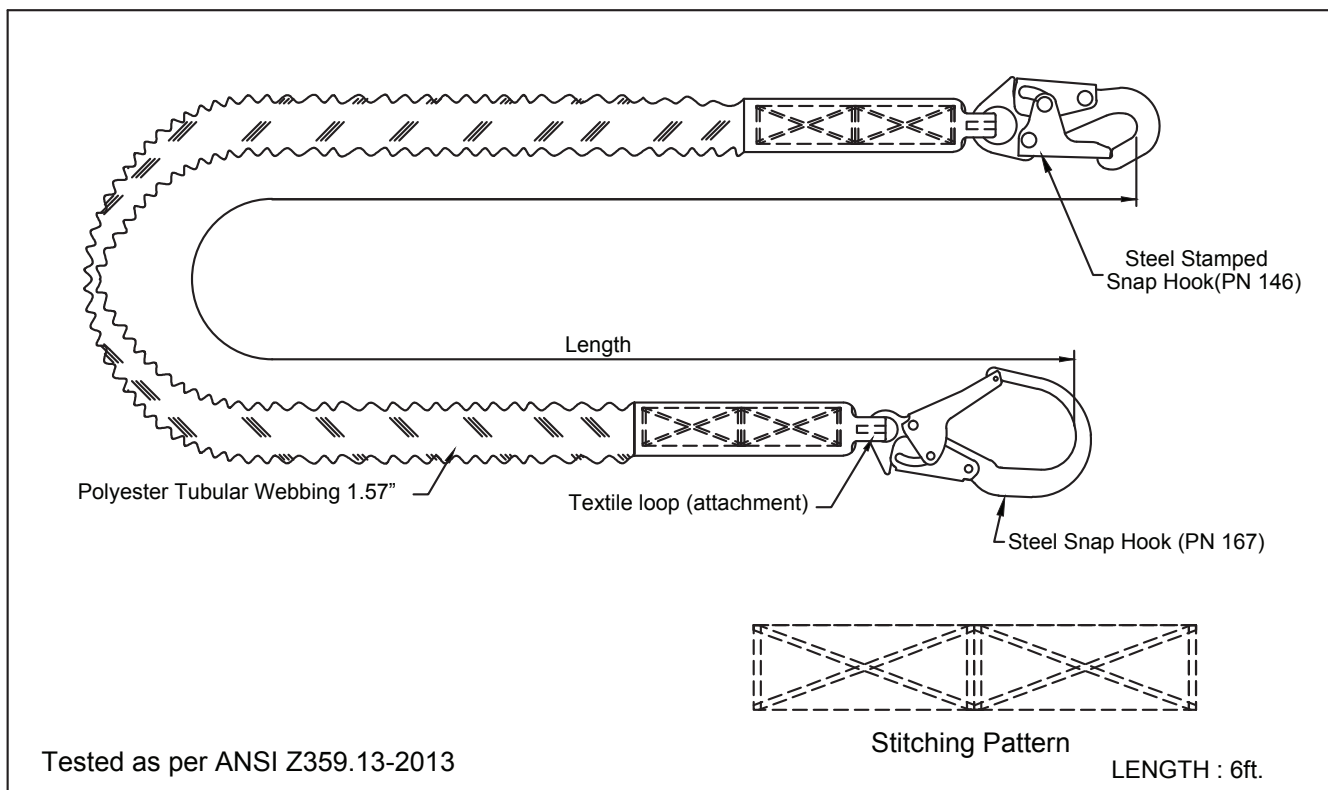

- DESIGN:**
- 1.57 in. wide polyester tubular webbing incorporated with energy absorbing (6 ft.) POY webbing.
 - One end of the lanyard equipped with steel stamped snap hook (PN-146) and the other end of the lanyard equipped with a steel snap hook (PN-167).

WEBBING: Material: Polyester | Width: 1.57 in. ± 0.04 in. | Breaking Strength: 5000 lbs.

STITCHING THREAD: Material: High-tenacity polyester

METAL COMPONENTS: Material: Alloy steel
 Plating: Zinc plated
 Finish: Shot blasted
 Breaking Strength: 5000 lbs.

VITAL TEST COMPLIANCE: Static Strength: 5000 lbs. for 1 minute
 Dynamic Strength: Maximum breaking force does not exceed 1800 lbs. in the line when tested on a free fall from 6 ft. height attached to a test mass of 282 lbs.

WEIGHT: 3.37 lbs. ± 0.02 lbs.