


TECHNICAL SPECIFICATIONS

Dual SRL LE 9' Galvanized Cable with Small Hook and SRL170 Connector

SRD 9' Leading Edge Twin Galvanized Cable with Small hook, 9' retractable galvanized cable, swivel top composite housing, 3/4" load indicator hook, 1/2" carabiner included. Black housing. Meets or exceeds ANSI/ASSE Z359.14-2014 Class B SRL-LE.

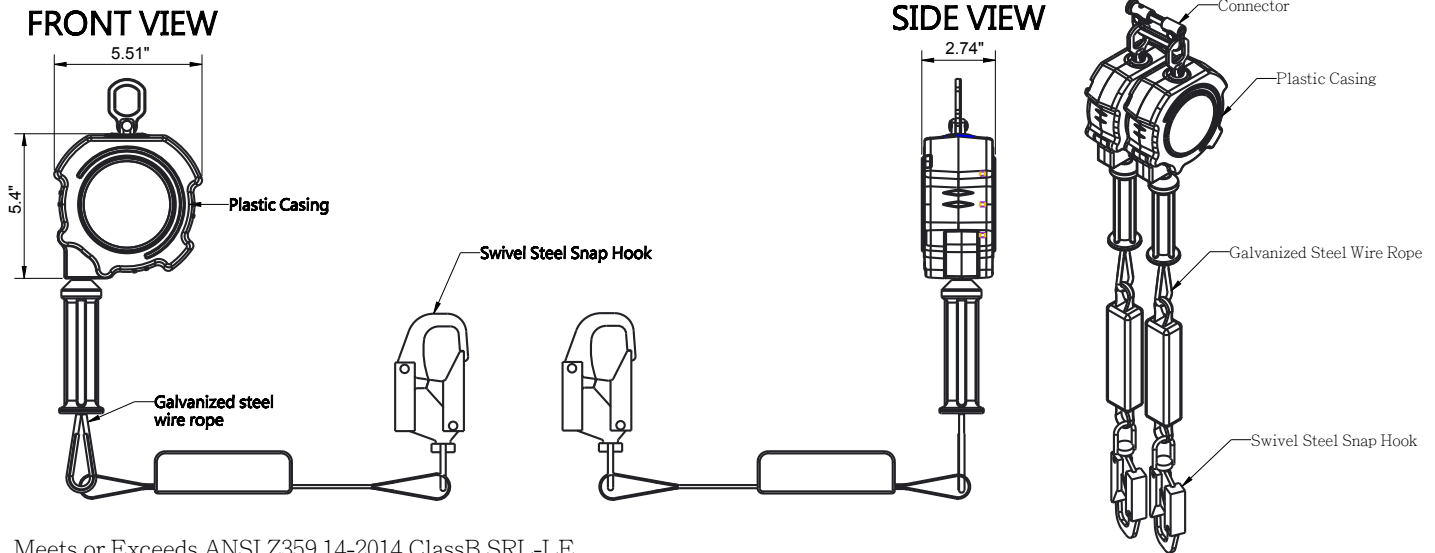

Meets or Exceeds ANSI Z359.14-2014 ClassB SRL-LE

PHYSICAL PARAMETERS:

- Composite housing.
- Extremely compact, durable and lightweight plastic casing.
- Has swivel anchorage eye at anchorage end. Swivel steel snap hook with load indicator at attachment end (gate strength 3600 lbs.).
- Galvanized steel wire rope 7/32".

LENGTH: 9 ft.

CABLE: Material: Galvanized steel wire rope diameter of 7/32"

MINIMUM BREAKING STRENGTH: 3300 lbs.

NORM: Meets or exceeds ANSI/ASSE Z359.14-2014 Class B SRL-LE.

VITAL TEST COMPLIANCE:

Static Strength: 3000 lbs. for 1 minute. Dynamic Strength: 300 lbs. mass subjected to a 4' free fall. SRL lock and remain lock until released.
 Dynamic Performance: 282 lbs. mass subjected to a zero free fall with extension of 36" lifeline. Braking force less than 1800 lbs. Average braking force less than 900 lbs. and arrest distance less than 54".

WEIGHT: 10.60 lbs. ± 0.02 lbs.

