


TECHNICAL SPECIFICATIONS

SRL LE 9' Galvanized Cable with Steel Rebar Hook

SRD 9' Leading Edge Single Galvanized Cable with Steel Rebar hook, 9' retractable galvanized cable, swivel top composite housing, 2-1/2" galvanized rebar hook, 1/2" carabiner included. Black housing. Meets or exceeds ANSI/ASSE Z359.14-2014 Class B SRL-LE.

FRONT VIEW SRL1411222

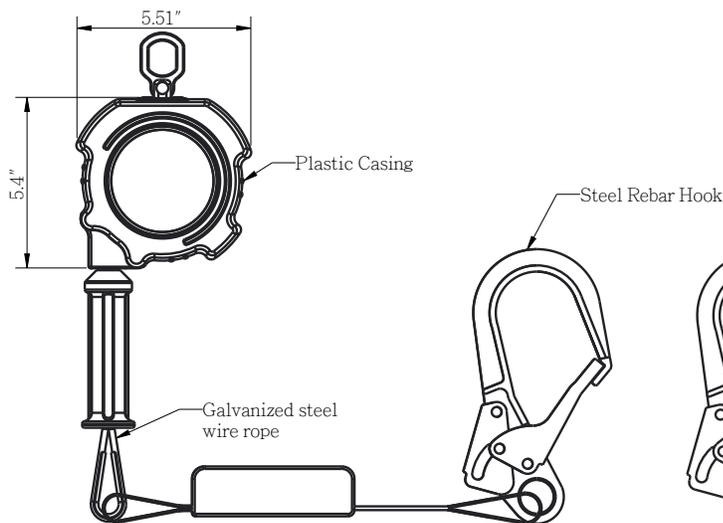

SIDE VIEW



Meets or Exceeds ANSI Z359.14-2014 ClassB SRL-LE

PHYSICAL PARAMETERS:

- Composite housing.
- Extremely compact, durable and lightweight plastic casing.
- Stainless Steel and corrosion-resistant components.
- Quick activating speed sensing brake systems.
- Galvanized steel wire rope 7/32".
- For sharp edge application.

LENGTH: 9 ft.

CABLE: Material: Galvanized steel wire rope diameter of 7/32"

MINIMUM BREAKING STRENGTH: 3300 lbs.

NORM: Meets or exceeds ANSI/ASSE Z359.14-2014 Class B SRL-LE.

VITAL TEST COMPLIANCE:

Static Strength: 3000 lbs. for 1 minute. Dynamic Strength: 300 lbs. mass subjected to a 4' free fall. SRL lock and remain lock until released.
 Dynamic Performance: 282 lbs. mass subjected to a zero free fall with extension of 36" lifeline. Braking force less than 1800 lbs. Average braking force less than 900 lbs. and arrest distance less than 54".

WEIGHT: 5.57 lbs. ± 0.02 lbs.

