

PN: SRL411222



• Fall Protection • Competent Training • Netting • PPE

Phone: (504) 733-1808
Fax: (504) 733-2996
PalmerSafetyUS.com


TECHNICAL SPECIFICATIONS

SRD 12' Leading Edge Galvanized Cable with 2-1/4" Steel Rebar Hook

12' leading edge single retractable galvanized cable, swivel top composite housing, 2-1/4" steel rebar hook, 1/2" carabiner included. Black housing. Meets or exceeds ANSI/ASSE Z359.14-2014 Class B SRL-LE.

FRONT VIEW SRL411222

SIDE VIEW

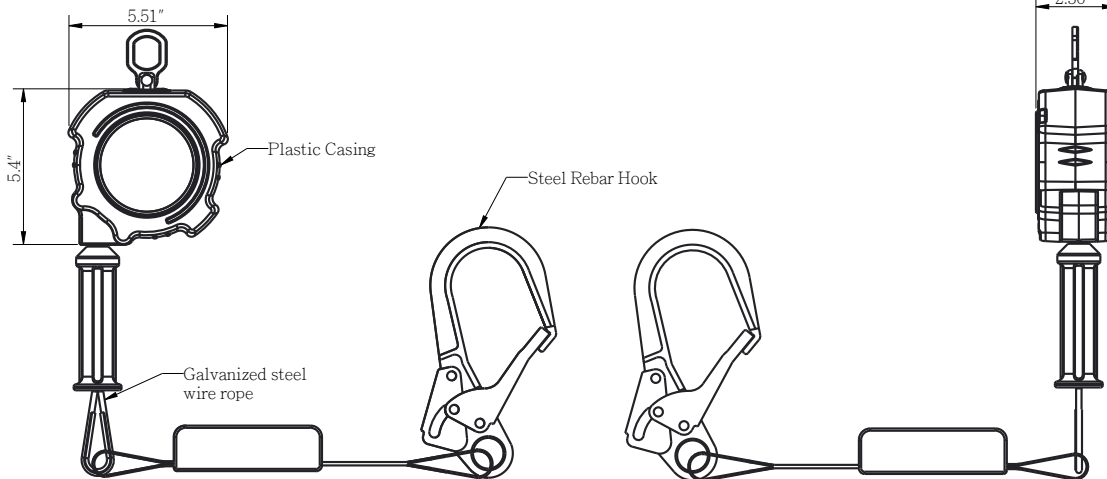

Meets or exceeds ANSI Z359.14-2014 Class B SRL-LE

PHYSICAL PARAMETERS:

- Composite housing.
- Extremely compact, durable and lightweight plastic casing.
- Stainless Steel and corrosion-resistant components.
- Quick activating speed sensing brake systems.
- Galvanized steel wire rope 7/32".
- For sharp edge application.

LENGTH: 12 ft.

SIZE: L x W x H: 30.71"x5.51"x 2.36"

CABLE: Material: Galvanized steel wire rope diameter of 7/32"

USER CAPACITY: 130-310 lbs.

NORM: Meets or exceeds ANSI/ASSE Z359.14-2014 Class B SRL-LE.

WEIGHT: 5.89 lbs. ± 0.02 lbs.