




TECHNICAL SPECIFICATIONS

Anchor Cross Arm Strap (Various Lengths)

3" strap in various lengths with large D-ring pass-through and small D-ring. Meets or Exceeds ANSI Z359.1-2007 and OSHA.

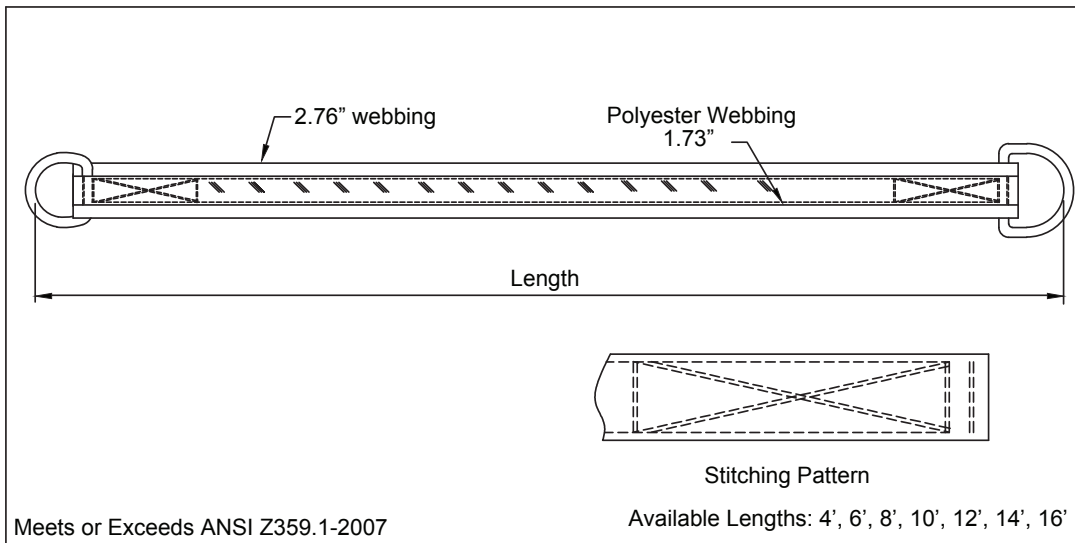

Installation Examples:



DESIGN: 1.73 in. wide polyester webbing stitched with 2.76 in. webbing on the back for extra protection.

WEBBING: Material: Polyester
 Width: 1.73 in. ± 0.04 in. and 2.76 in. ± 0.04 in.
 Breaking Strength: 5000 lbs.

STITCHING THREAD: Material: High-tenacity polyester

METAL COMPONENT: Material: Alloy Steel
 Finish: Golden Yellow Galvanized
 Breaking Strength: 5000 lbs.

VITAL TEST COMPLIANCE: Static Strength: 18 kN for 3 Minutes
 Dynamic Strength: Free fall from 4.92 ft. height with test mass of 220.46 lbs.

WEIGHT: 3.28 ft.: 0.99 lbs. ± 0.02 lbs.
 4.92 ft.: 1.10 lbs. ± 0.02 lbs.
 6.56 ft.: 1.21 lbs. ± 0.02 lbs.

Part #	Length
A48806	4'
A72806	6'
A96806	8'
A120806	10'
A144806	12'
A168806	14'
A192806	16'