
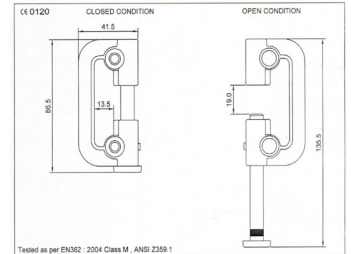



TECHNICAL SPECIFICATIONS

Dual SRL 9 ft. Light Weight Web with Tie Back Hook (SRL169 or SRL170).

9 ft. Twin Retractable Web SRL with Tie-Back Hook, 1/2" carabiner, black housing. Max arresting dist. 24", Average arresting force 1,350 lbs. Meets or Exceeds ANSI Z359.14-2014 Class A SRL.

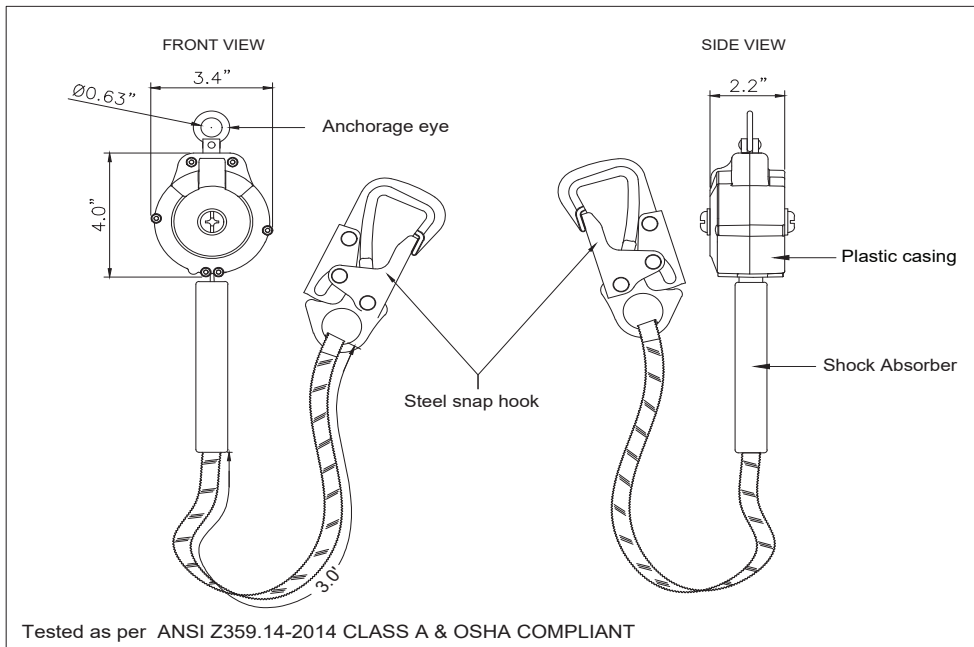

Hook Twin SRL Steel Connector

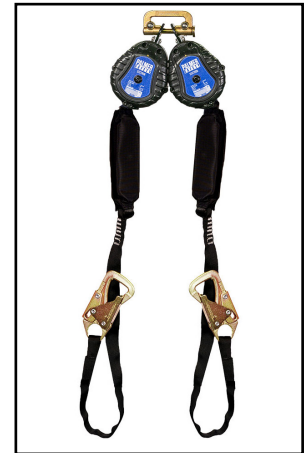

PHYSICAL PARAMETERS:

- Lightest available Dual SRL in it's range/class.
- Robust & durable plastic casing.
- Technora Webbing with Energy absorber.
- Swivel steel snap hook at Attachment end (as per ANSI Z359.12:2009 gate strength 3600 lbs.)
- 3.0' Additional lanyard for tie back purpose.

WORKING LENGTH: 9.0' (Maximum)

WEBBING: Material: Technora Webbing
 Width: 13/16"
 Minimum Breaking Strength: 4500 lbs.

SHOCK ABSORBER: Material : Nylon tear webbing with teflon coating.
 Width : 1.18"

NORM: Meets ANSI Z359.14-2014 Class A & OSHA Compliant

WEIGHT: 1.421 lbs ± 0.02 lbs. (per SRL)

COMPLIANCE STANDARD: ANSI Z359.14-2014 Class A

WEIGHT: 3.22 lbs. (per SRL)